


ACC-MNT-MJBOX-1

Mini Junction Box Mount

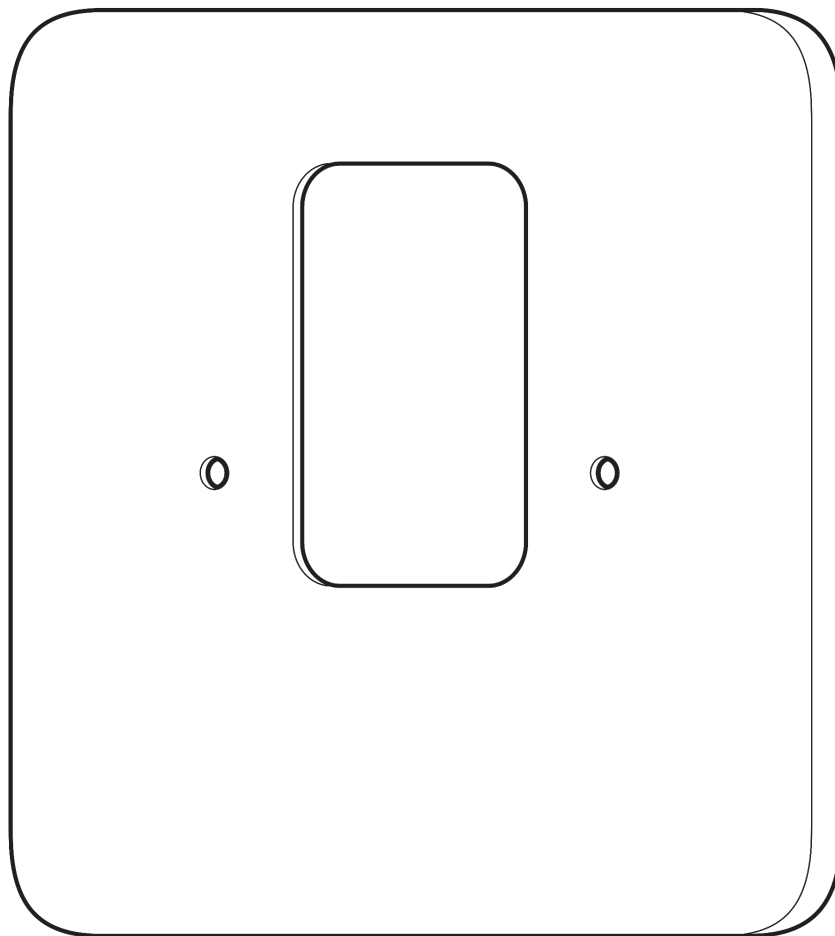

Document


Document Details

v1.0 (20230615)


(v1.0 first published 20230615)




What's in the box

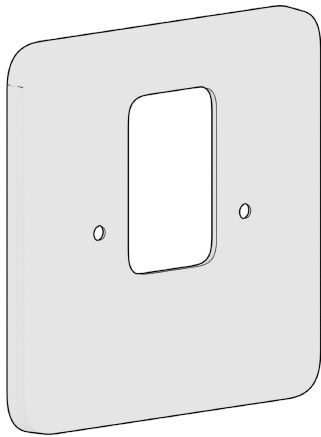


Mini Junction Box Mount

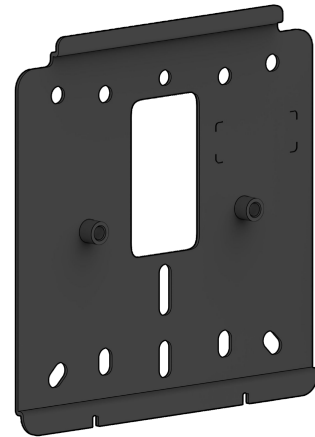


Accessory Mount Plate



M4 x L8 Machine Screws
2 pcs

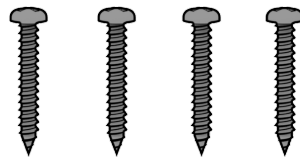

Wood Screws
4 pcs

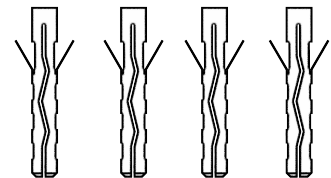

Wall Anchors
4 pcs

What you'll need

- A Verkada Mini Dome Camera
- A T10 Torx Security Screwdriver
- A #2 Phillips screwdriver or power drill with a #2 Phillips driver bit
- 5/16 inch (7.9mm) drill bit for wall anchors
- 1/8 inch (3mm) drill bit for pilot holes

Compatible products


For a list of compatible products, please visit:
<https://docs.verkada.com/docs/accessories-overview.pdf>

Installation

Mounting (1/5)

Using the T10 Torx screwdriver, undo the top cover of the Verkada Mini Dome Camera.

Separate the camera from the camera mount plate.

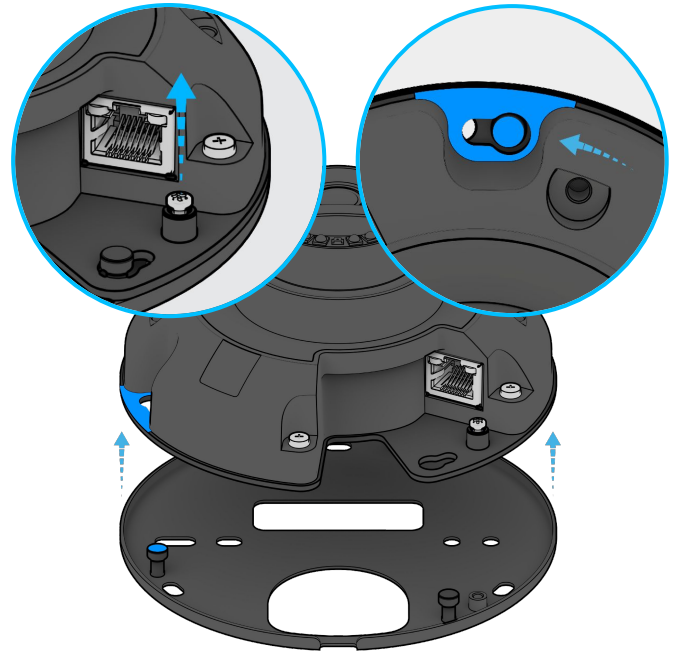


Mounting to wall

Place the accessory mount plate at the desired location and use it to mark wall mount holes.

For a solid material like wood or metal, drill 1/8 inch pilot holes. Drive mounting screws directly into the pilot holes.

For masonry, drill 1/4 inch holes. Insert plastic anchors into holes and drive mounting screws into the anchors.

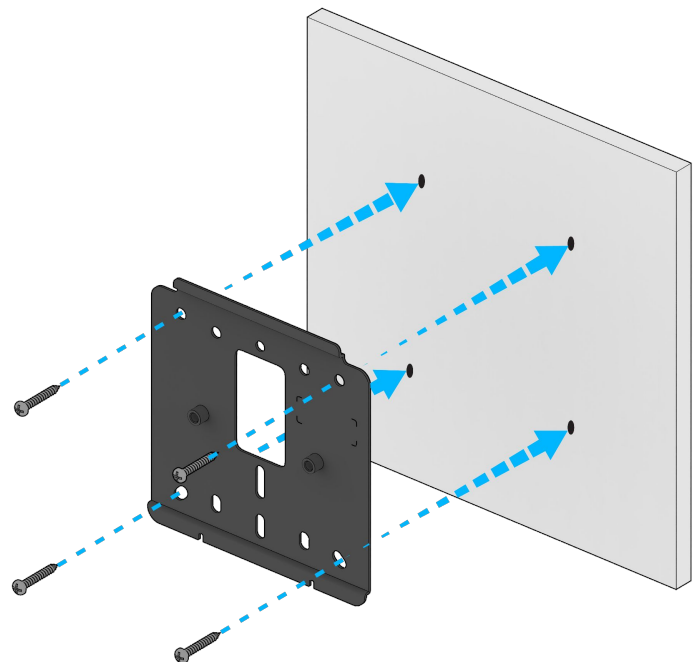


Mounting (2/5)

Mounting to wall (Cont.)

Once the accessory mount plate is installed, hook the junction box cover onto it.


Push the cover into the mount plate to snap it into place.

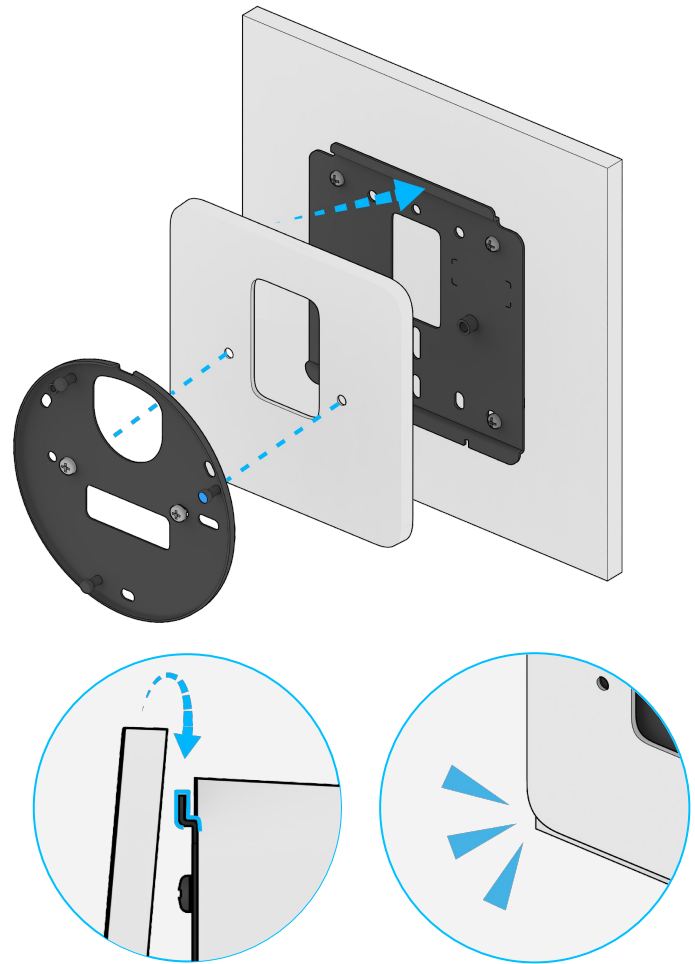

Reattach the Mini Dome Camera to its mount plate.

Use the T10 Torx security screwdriver to reassemble the top cover onto the camera.


Continue with CM42 install guide.

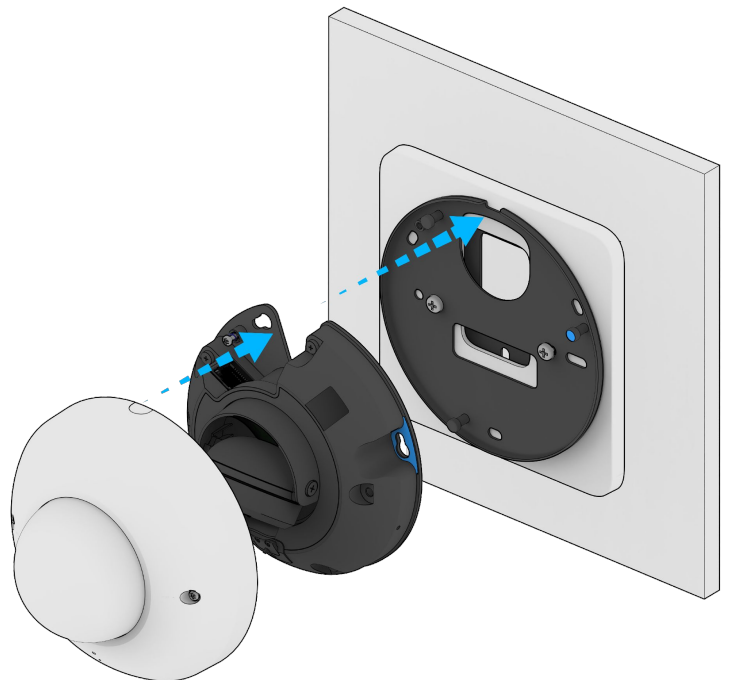


Mounting (3/5)

Mounting to ACC-MNT-11

Attach ACC-MNT-11 to the wall according to its install guide.

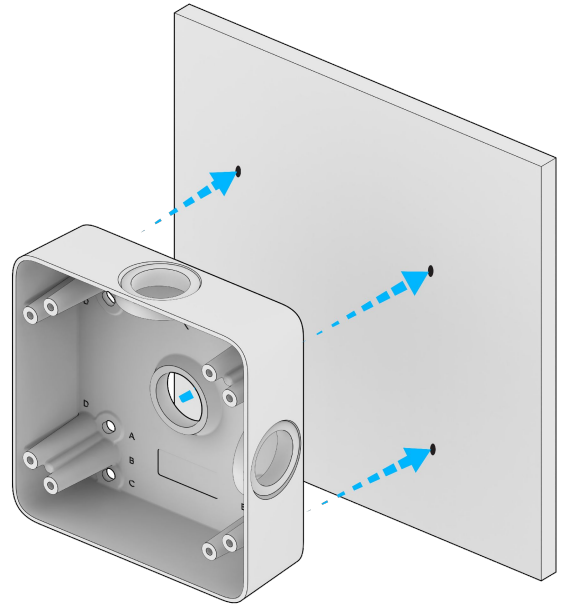

Use the 4 machine screws provided with ACC-MNT-11 to attach the accessory mount plate. Use hole pattern 'B'.

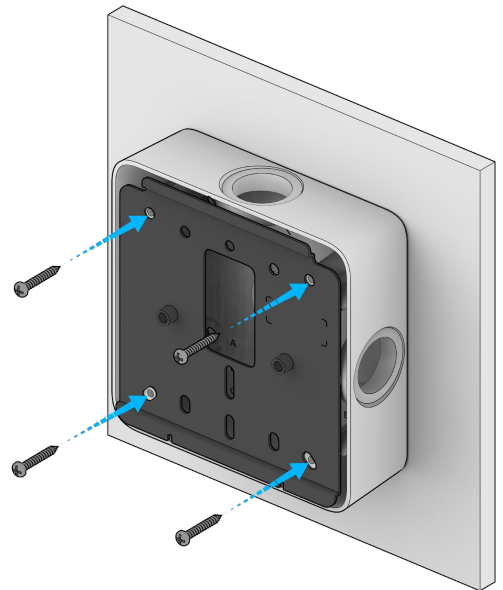


Installation


Mounting (4/5)

Once the accessory mount plate is installed, hook the junction box cover onto it.

Push the cover into the mount plate to snap it into place.

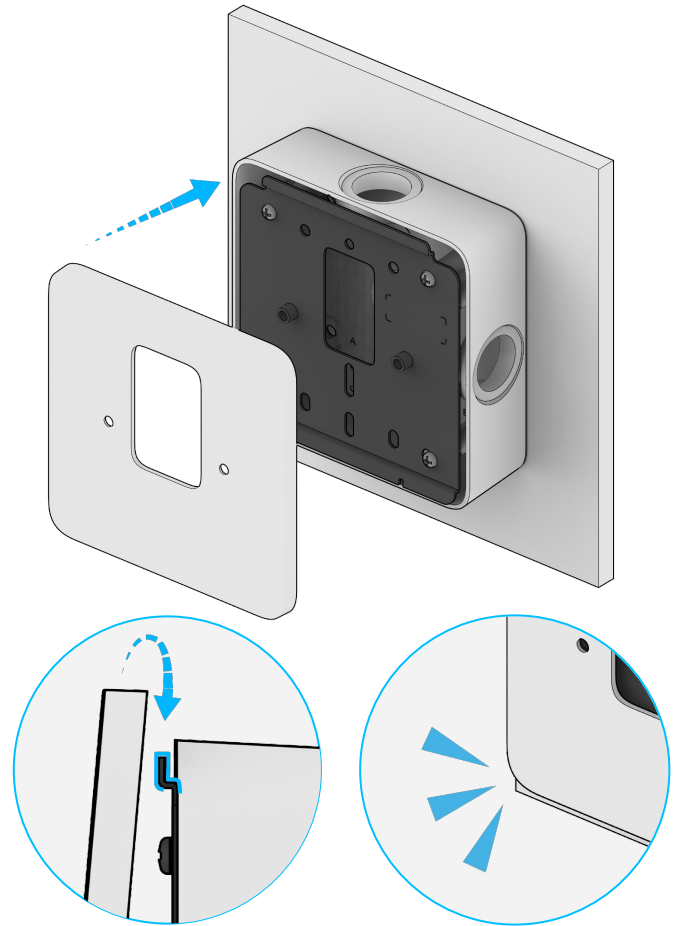

Using a #2 Phillips screwdriver and the provided M4 machine screws, attach the camera mount plate to the accessory mount plate (through the junction box cover).

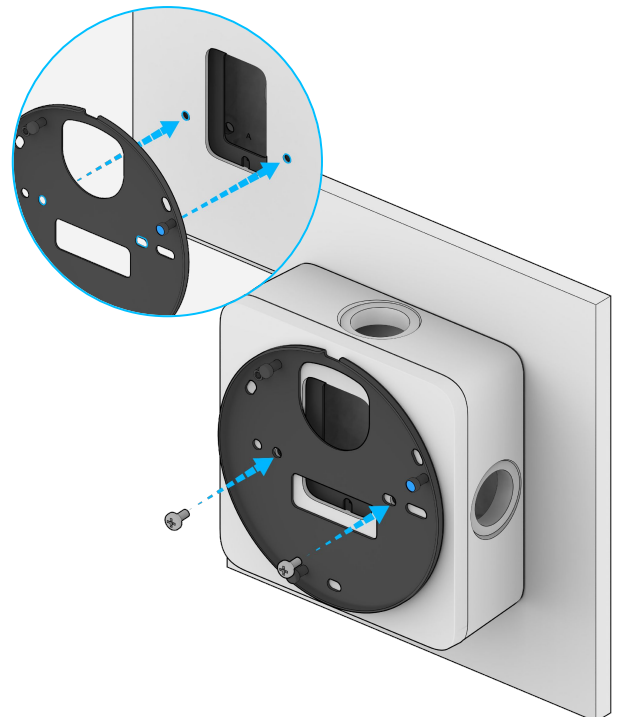


Installation

Mounting (5/5)

Reattach the Mini Dome Camera to its mount plate.

Use the T10 Torx security screwdriver to reassemble the top cover onto the camera.

Continue with CM42 install guide.

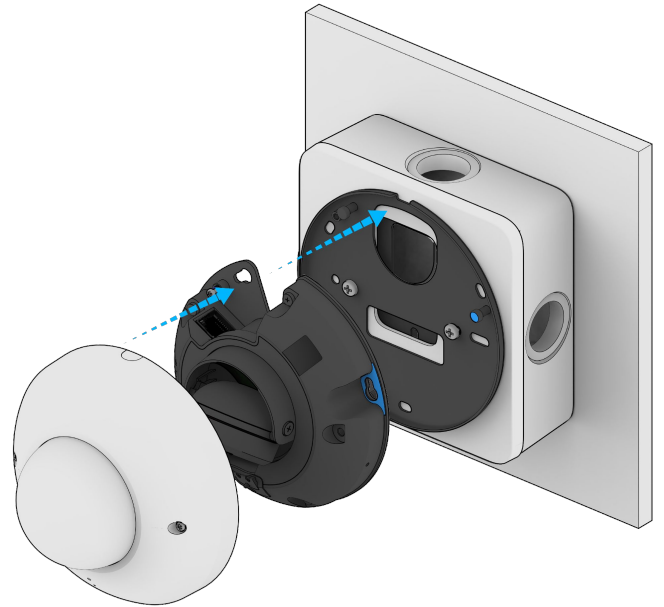

Appendix

Support

Thank you for purchasing this Verkada product. If for any reason you're experiencing issues or need assistance, please contact our 24/7 Technical Support Team immediately.

Sincerely,
The Verkada Team
verkada.com/support

