



# ACC-MNT-POLE-1


## Pole Mount

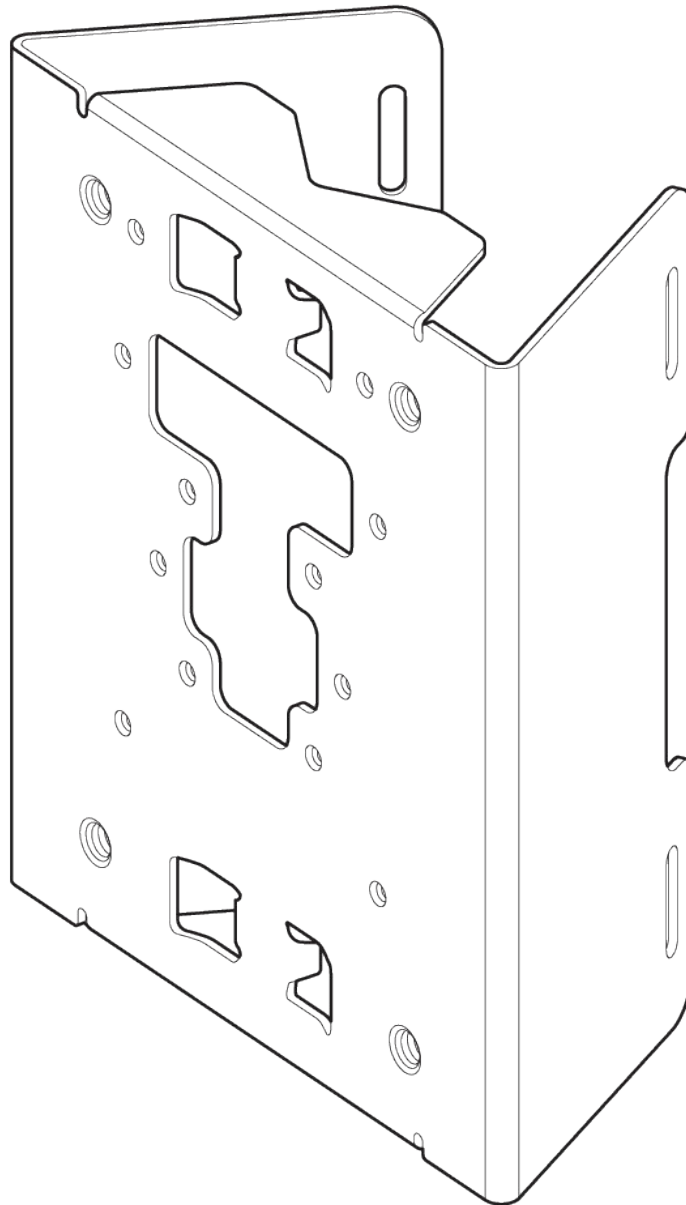


## What's in the box

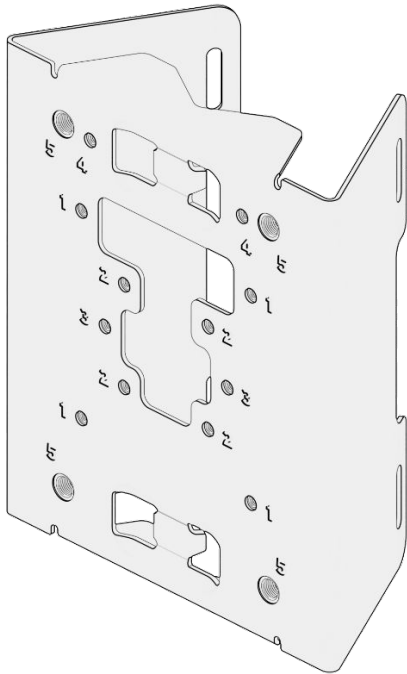


**ACC-MNT-POLE-1**




**M4x0.7 Machine Screw (4 pcs)**  
Length: 14mm Drive: #2 Phillips



**Small Pole Straps (2 pcs)**  
Pole Diameter: 48-107mm (1.9-4.2")  
Drive: #2 Phillips

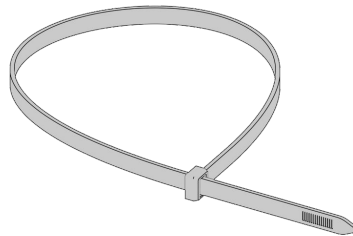

**Temporary Zip Tie (1 pcs)**  
Pole Diameter: 48-178mm (1.9-7.0")

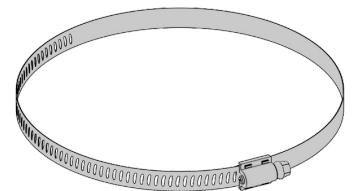

**Large Pole Straps (2 pcs)**  
Pole Diameter: 84-178mm (3.3-7.0")  
Drive: #2 Phillips

## What you'll need


- Compatible Verkada product
- A #2 Phillips screwdriver or power drill with a #2 Phillips driver bit
- 1/2 inch (12.7mm) drill bit, or larger, for routing cable through wall
- Utility knife

## Compatible products

For a list of compatible products, please visit:  
<https://docs.verkada.com/docs/accessories-overview.pdf>

## Hole Patterns

- 1 CD/CF series, Verkada mounts
- 2 CB series
- 3 CM series
- 4 ACC-CAM-SHIELD-1
- 5 ACC-MNT-XLARM-1

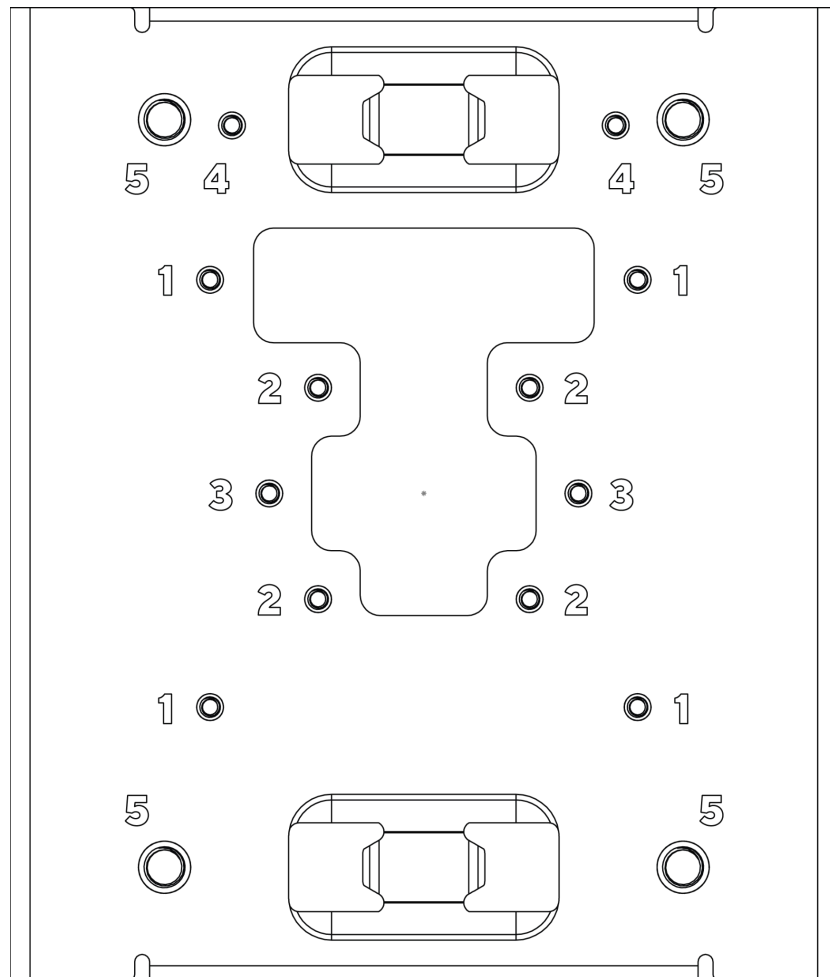

## Installation

### Mounting on a small pole

For poles with diameter of less than 3.2" (81 mm).

*A zip tie is provided to aid in the install process. Make sure to remove it once installation is completed.*

Position the Pole Mount in the desired location.

Route *the temporary zip tie* through the top, front slot and around the pole.



Route a small pole strap through the bottom, front slot and around the pole. Tighten with a #2 Phillips head screwdriver or drill bit.

Remove the *temporary zip tie* with a utility knife and repeat the former installation step on the top, front slot.

Secure the mount to the pole by tightening the pole straps.

Once complete, mount a compatible Verkada product onto the Pole Mount.

See the install guide of your compatible Verkada product for further mounting instructions.

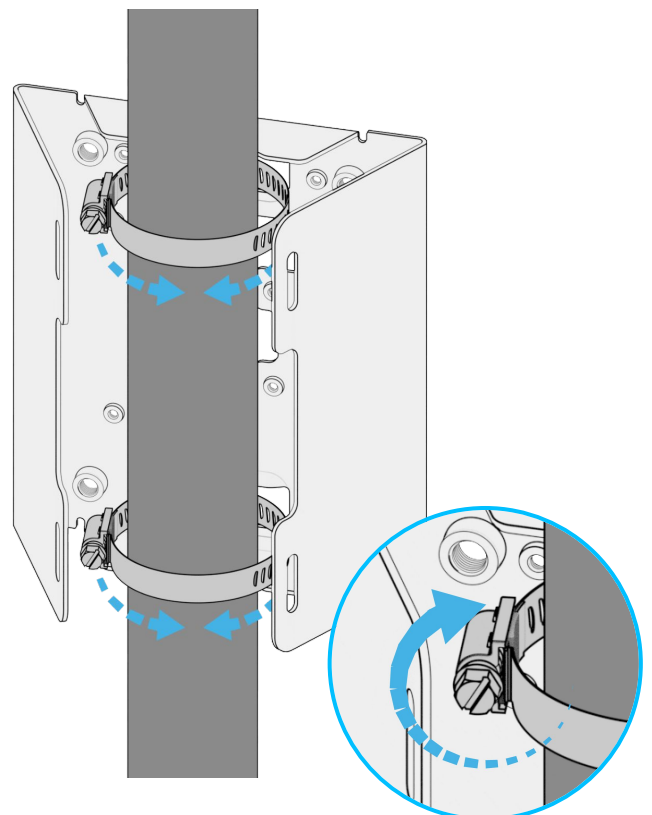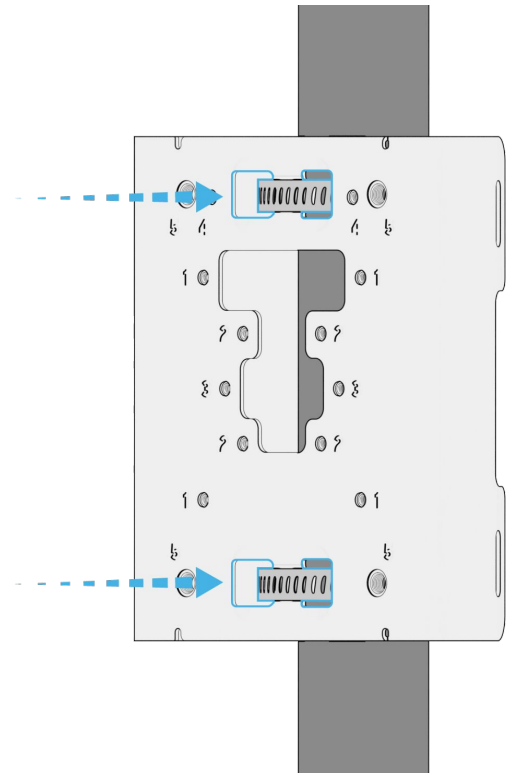

## Installation

### Mounting on a large pole

For poles with diameter of more than 3.2" (81 mm).


*A zip tie is provided to aid in the install process. Make sure to remove it once installation is completed.*

Position the Pole Mount in the desired location.

Route *the temporary zip tie* through the top, side slots and around the pole.

Route a large pole strap through the bottom, side slots and around the pole. Tighten with a #2 Phillips head screwdriver or drill bit.


Remove the *temporary zip tie* with a utility knife and repeat the former installation step on the top, side slots.

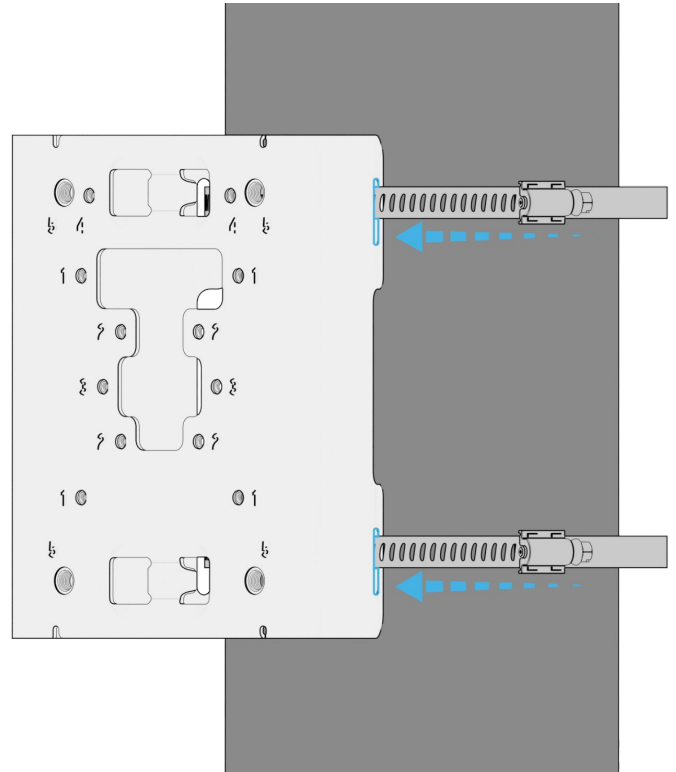

Secure the mount to the pole by tightening the pole straps.

Once complete, mount a compatible Verkada product onto the Pole Mount.

See the install guide of your compatible Verkada product for further mounting instructions.

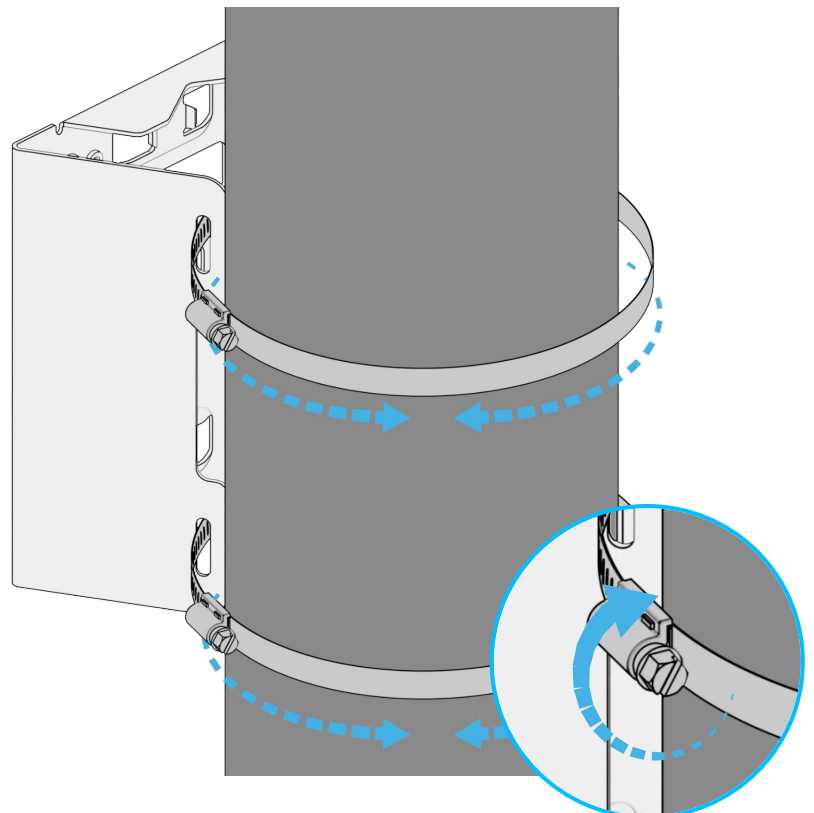

## Appendix

### Support

Thank you for purchasing this Verkada product. If for any reason you're experiencing issues or need assistance, please contact our 24/7 Technical Support Team immediately.

Sincerely,  
The Verkada Team  
[verkada.com/support](https://verkada.com/support)

