


ACC-NS-MNT-SURF-1

Speaker Surface Mount for NS151

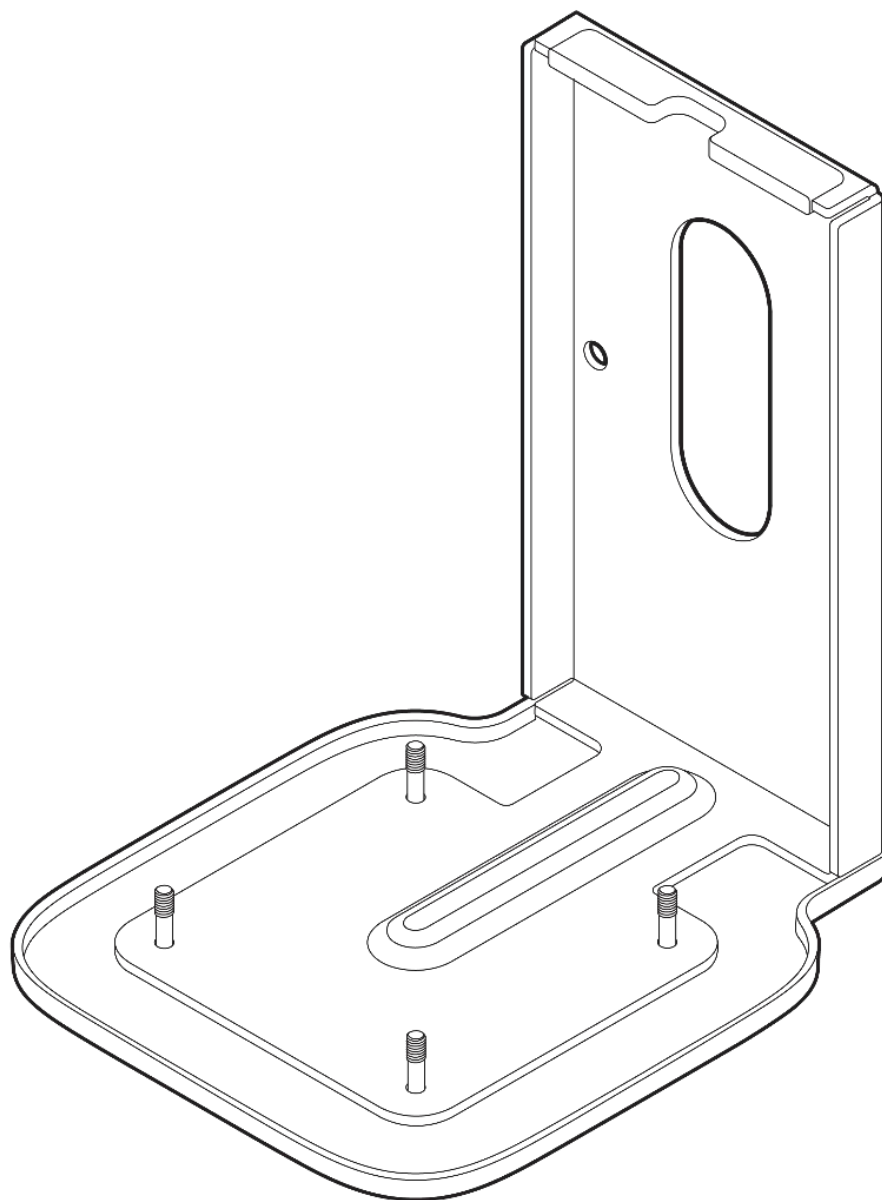

Document Details

Version

v1.0 (20260916)

(V1.0 published 20260916)

Document ID: ACC-NS-MNT-SURF-1 Install Guide

Product Models

This install guide pertains to model ACC-NS-MNT-SURF-1.

© Copyright 2026 Verkada Inc. All rights reserved.

Verkada and the Verkada logo are registered trademarks or service marks of Verkada Inc. ("Verkada"). All other trademarks are the property of their respective owners.


Verkada may make changes to this document at any time without notice. The information presented herein may be inaccurate or outdated, and Verkada is under no obligation to maintain it. ALL INFORMATION IS PROVIDED "AS-IS" AND WITHOUT ANY WARRANTIES, IMPLIED, EXPRESS, OR OTHERWISE. VERKADA DISCLAIMS LIABILITY FOR ALL DAMAGES, INCLUDING WITHOUT LIMITATION ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES, ARISING OUT OF USE OF THIS DOCUMENT.

Any intellectual property rights relating to Verkada products are and shall remain Verkada's exclusive property. Use of any Verkada product is subject to Verkada's end user agreement or other executed agreement with Verkada. No license, either expressed or implied, to use or distribute any Verkada product is granted under this document.

This document may not be sold, resold, licensed or sublicensed and may not be transferred without Verkada's prior written consent. No part of this document may be reproduced in whole or in part without the express written consent of Verkada.




What's in the Box

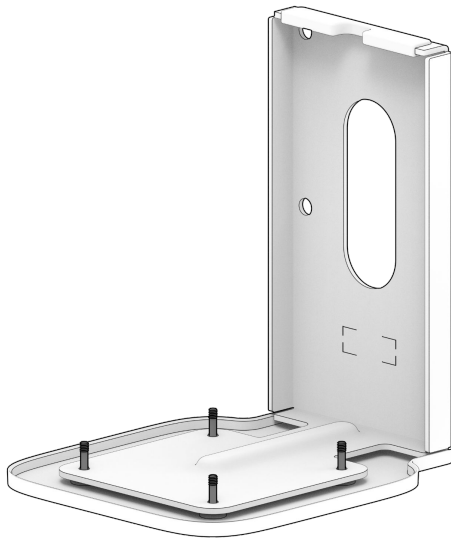

ACC-NS-MNT-SURF-1



M4 Wall Mount Screws (4 pcs)
Length: 25mm Diameter: 4mm
Drive: #2 Phillips



#8 Wall Anchors (4 pcs)
Length: 30mm Drill Size: 1/4 inch
(6.25mm)

What you'll need

- A smartphone or laptop
- 1/4 inch (6.5mm) drill bit for wall anchors (if necessary)
- 1/8 inch (3mm) drill bit for pilot holes (if wall anchors are not used)
- A Cat5 or Cat6 Ethernet cable with a 0.2-0.25 inch diameter (5-6.5mm)
- #2 Phillips screwdriver


Placement

Mount the product directly on a wall or attach it to ACC-NS-ANGLE-W-1.

Installation

Wall Mounting 1/3


Secure the Surface Mount to the mounting surface with the four included screws and wall anchors, if necessary.

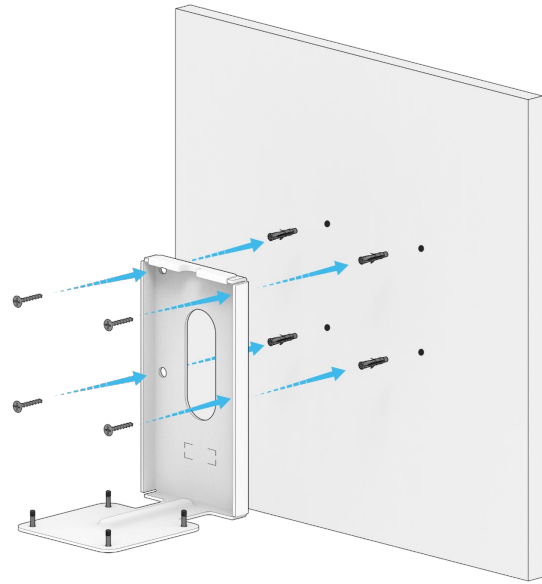

Routing Options

Cables can be routed through the surface, or along the surface.

Through the surface

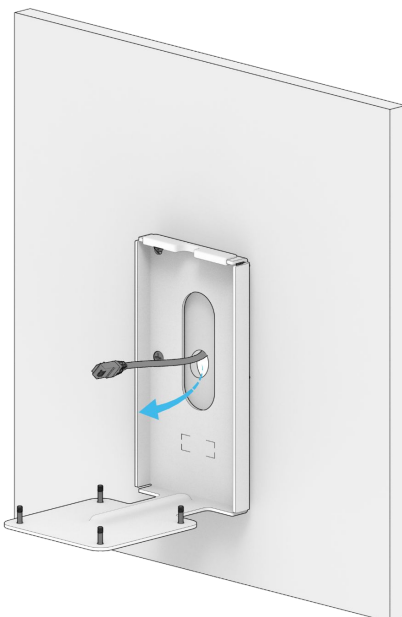

Along the surface (Through the top)



Installation


Wall Mounting 2/3

Connect the cables to the Speaker.

Note: The NSI51 can be powered over POE or with the provided AC adapter.


Position the Speaker on the Surface Mount, so the plate aligns with the bottom cut-out of the speaker.

Secure the Speaker to the Surface Mount with the captive screws.

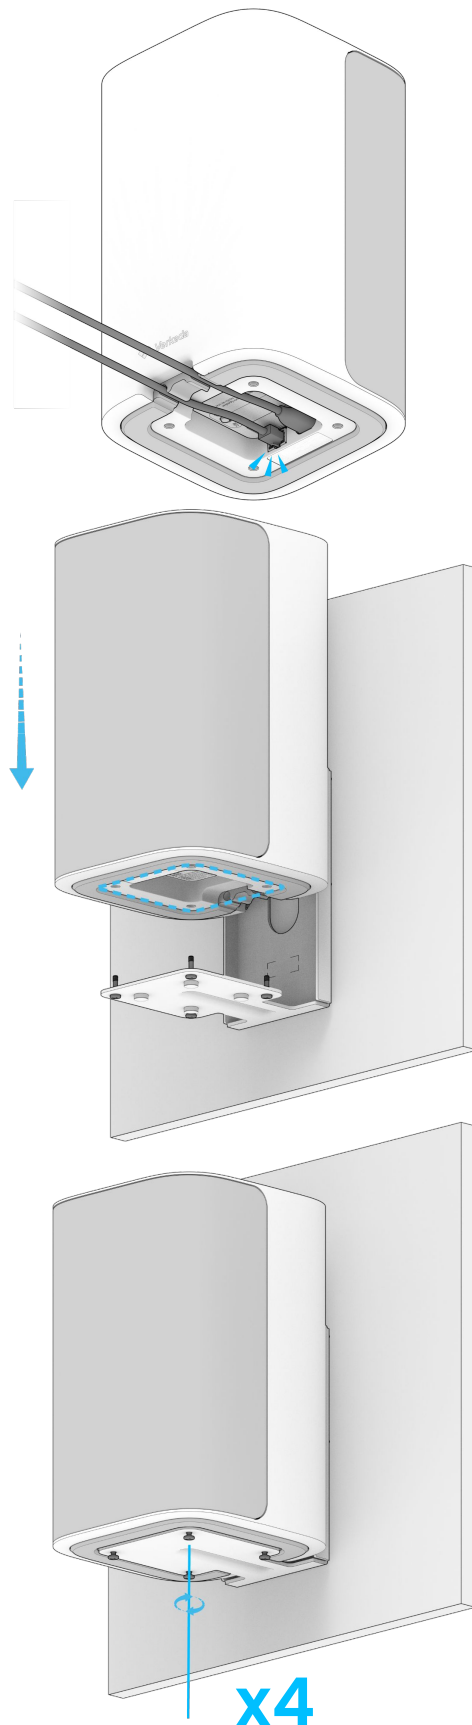

Wall Mounting 3/3


Attach the magnetic screw cover to the bottom of the Surface Mount.

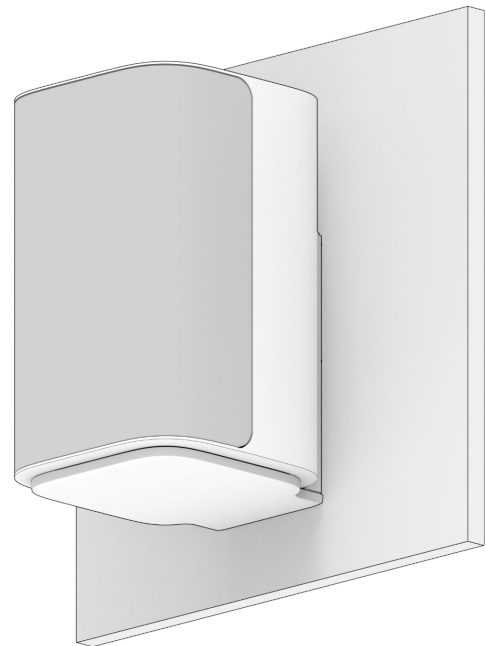


Installation

Angle Mounting with ACC-NS-MNT-ANGLE-1 1/3

Secure the The Angle Mount to the mounting surface with the four included screws and wall anchors, if necessary.

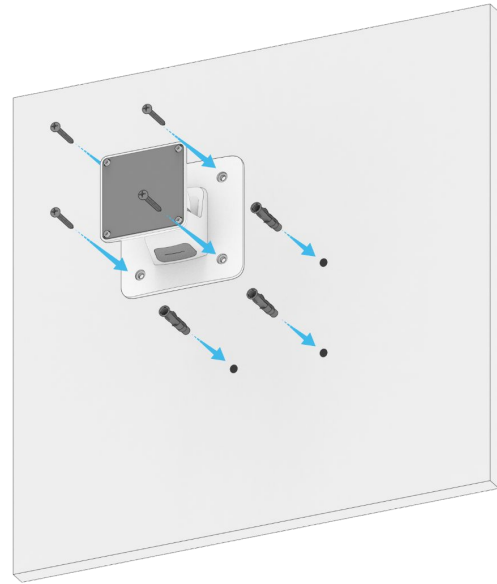

Secure the Surface Mount to the Angle Mount mount with the four included mounting screws.

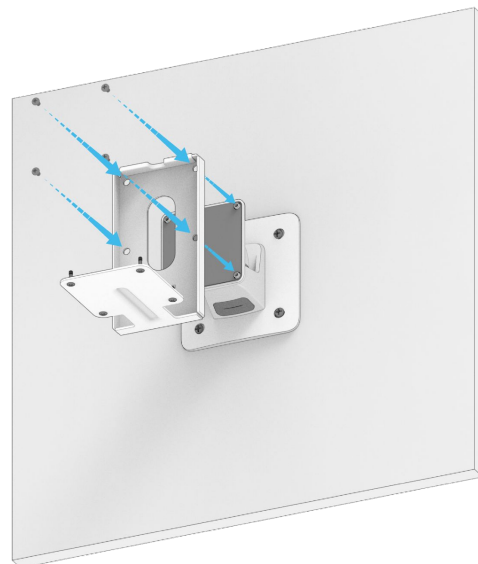


Installation

Angle Mounting with ACC-NS-MNT-ANGLE-1 2/3

Route the Ethernet and AC cable through the Surface Mount.



Position the Speaker on the Surface Mount, so it aligns with the bottom cut out of the speaker.

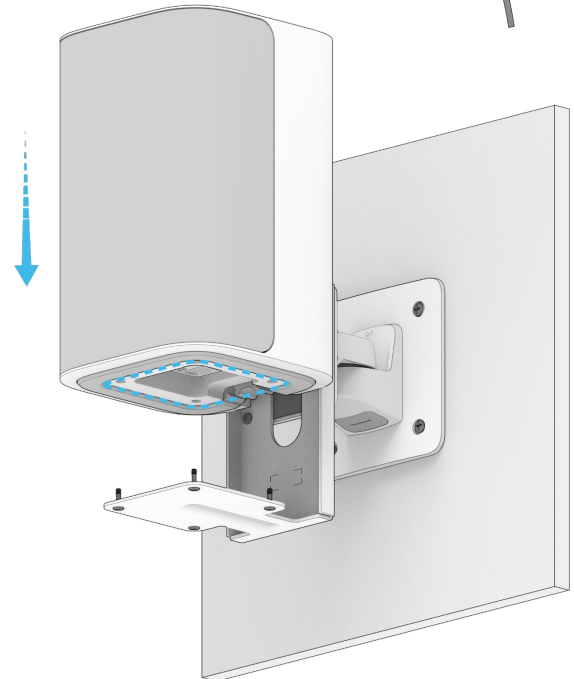

Secure the Speaker to the Surface Mount with the captive screws.



Installation

Angle Mounting with ACC-NS-MNT-ANGLE-1 3/3

Attach the magnetic screw cover to the bottom of the Surface Mount.



Appendix

Support

Thank you for purchasing this Verkada product. If for any reason you're experiencing issues or need assistance, please contact our 24/7 Technical Support Team immediately.

Sincerely,
The Verkada Team
verkada.com/support

