


ACC-INT-SMB-4 Surface Mount for TD33

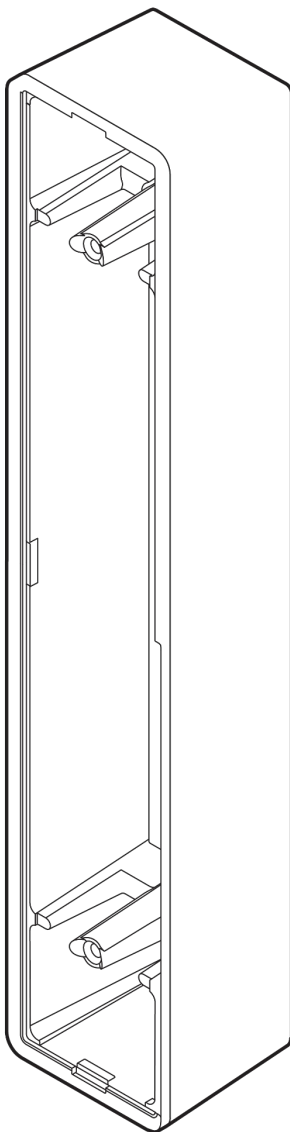

Document Details

Version

V1.0 20260225

(V1.0 published 20260225)

Firmware

Firmware version can be verified on Verkada
Command command.verkada.com.

Product Models

This install guide pertains to models:

ACC-INT-SMB-4

© Copyright 2026 Verkada Inc. All rights reserved.

Verkada and the Verkada logo are registered trademarks or service marks of Verkada Inc. ("Verkada"). All other trademarks are the property of their respective owners.

Verkada may make changes to this document at any time without notice. The information presented herein may be inaccurate or outdated, and Verkada is under no obligation to maintain it. ALL INFORMATION IS PROVIDED "AS-IS" AND WITHOUT ANY WARRANTIES, IMPLIED, EXPRESS, OR OTHERWISE. VERKADA DISCLAIMS LIABILITY FOR ALL DAMAGES, INCLUDING WITHOUT LIMITATION ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES, ARISING OUT OF USE OF THIS DOCUMENT.

Any intellectual property rights relating to Verkada products are and shall remain Verkada's exclusive property. Use of any Verkada product is subject to Verkada's end user agreement or other executed agreement with Verkada. No license, either expressed or implied, to use or distribute any Verkada product is granted under this document.

This document may not be sold, resold, licensed or sublicensed and may not be transferred without Verkada's prior written consent. No part of this document may be reproduced in whole or in part without the express written consent of Verkada.



What's in the Box




Surface Mount




#6-32 Machine Screws (2 pcs)
Length: 25.4mm Drive: #2 Phillips



M3.5x0.6 Machine Screws (2 pcs)
Length: 8mm Drive: #2 Phillips



Wall Screws (2 pcs)
Length: 25.4mm Drive: #2 Phillips




Wall Anchors (2 pcs)
Length: 25mm

What you'll need

- TD33 Video Intercom
- A #2 Phillips screwdriver or power drill with a #2 Phillips driver bit
- 1/4 inch (6.5mm) drill bit for wall anchors
- 1/8 inch (3mm) drill bit for pilot holes
- 7/8 inch (22mm) drill bit for pigtail pass throughs

Compatible Products

- TD33 Video Intercom

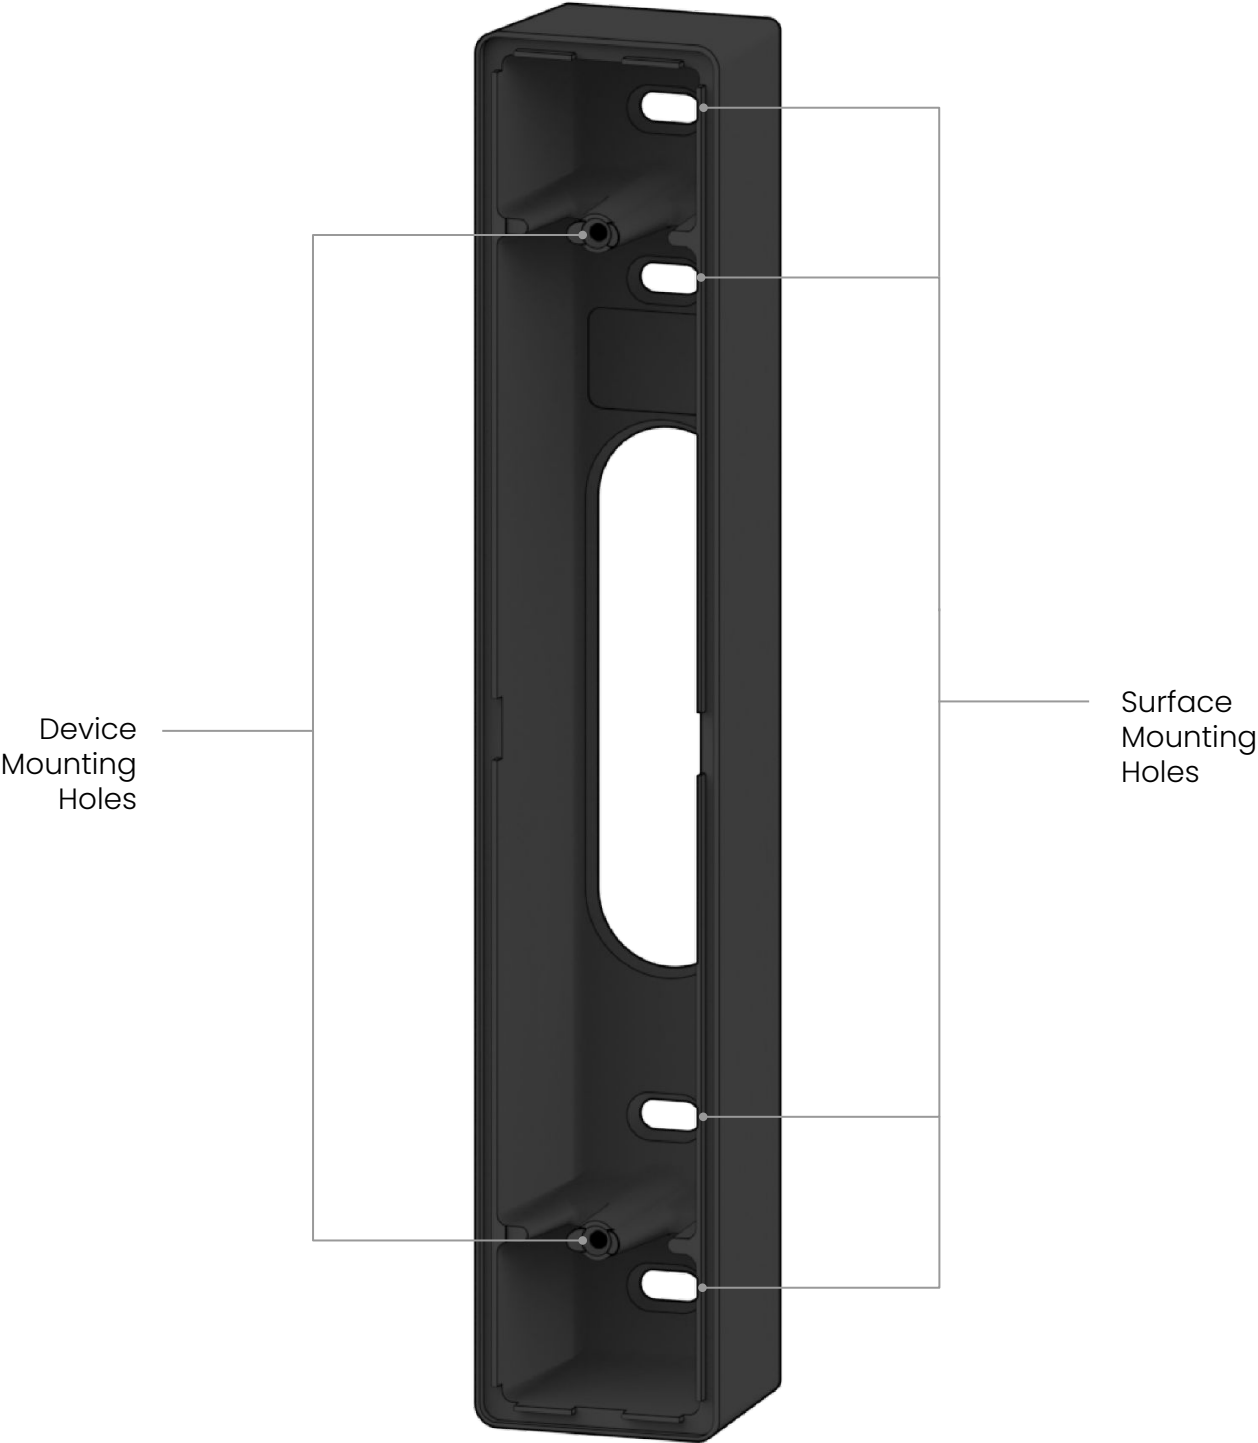


Installation

Mounting

Align the Mount to the wall and mark two mounting holes before drilling pilot holes with 1/8" drill bit.

Select one hole from the top set and one hole from the bottom.



Mark and drill a 7/8" hole for the pigtail to pass through (if necessary).

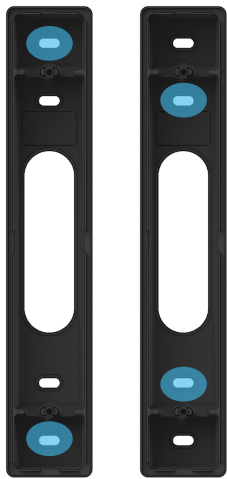

Fasten the Surface Mount with the two Wall Screws.

For a solid material like wood or metal, drill 1/8" pilot holes. Drive mounting screws directly into the pilot holes.

For drywall, drill 1/4" holes. Insert plastic anchors into holes and drive mounting screws into anchors.

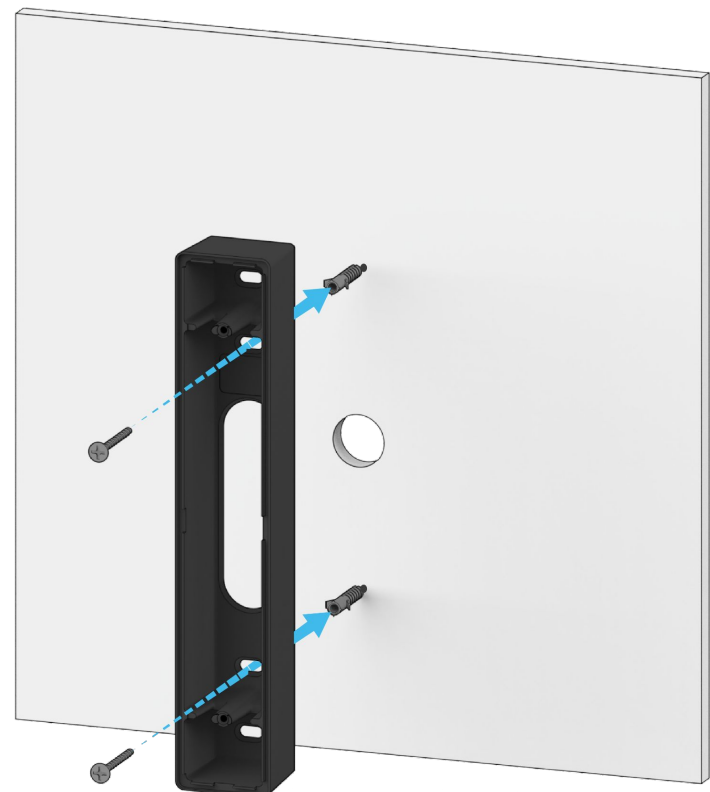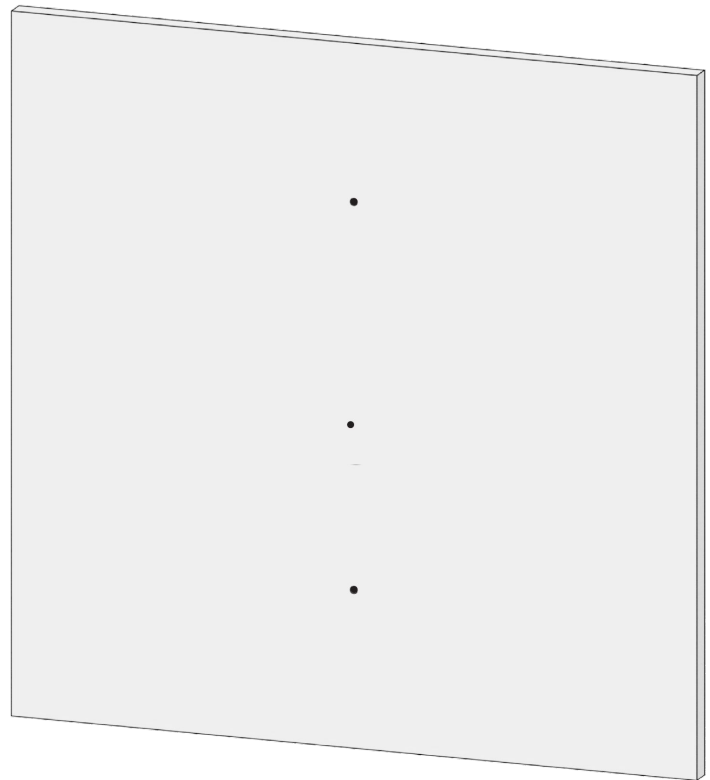

Installation

Mounting


Route the Ethernet Cable through the pass-through hole.



Retrieve the TD33 Video Intercom and its Mount Plate.

Route the Ethernet Cable through the mount plate and connect it to the TD33 Video Intercom.


Fasten the TD33 Mount Plate to the Surface Mount using two #6-32 Machine Screws.

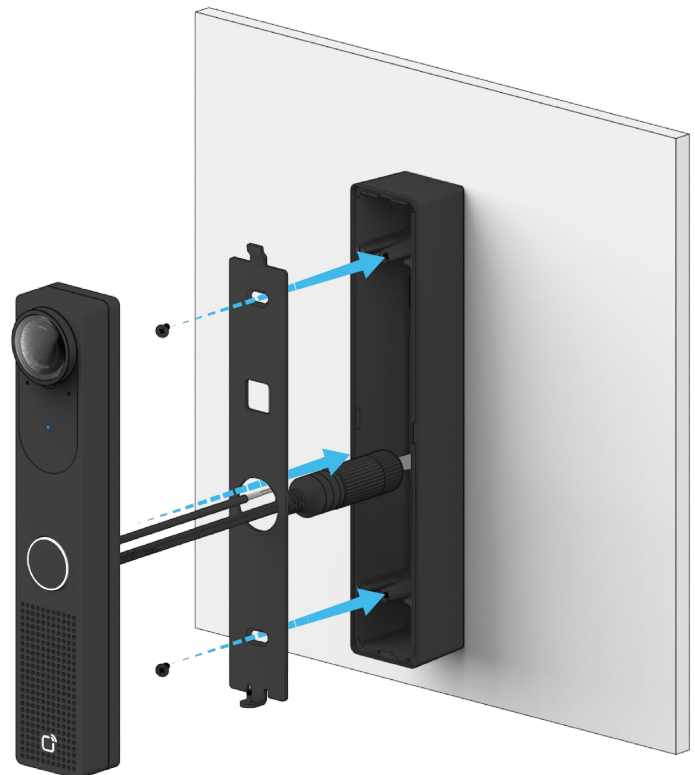

Installation

Secure

Guide the device onto the hook on the top edge of the Mount Plate. Gently swing the bottom edge of the device down, against the Mount Plate.

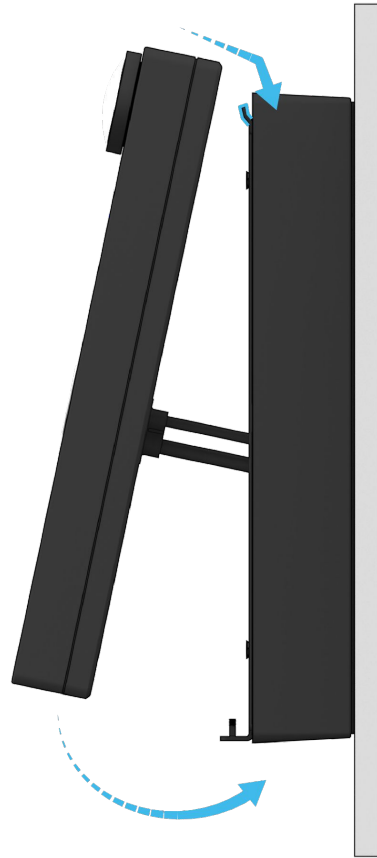

Secure the device by tightening the Security Screw at the bottom of the Mount Plate using the T10 Torx Security Screwdriver.



Appendix

Support

Thank you for purchasing this Verkada product. If for any reason you're experiencing issues or need assistance, please contact our 24/7 Technical Support Team immediately.

Sincerely,
The Verkada Team
verkada.com/support

